



### FUNNY SERIES FLAIL MOWERS

Funny Series Flail Mowers are light weight and resilient machines that are perfect for low HP tractors and are great for grass, small shrubs, and under trees and bushes. Models available with or without manual side shift or hydraulic side shift with tilt.

#### FUNNY

12-30 HP

Cutting Widths  
42" to 52"

Cutting Height  
1" to 4"

Side Shift  
N/A

- 3PT, CAT I
- Aluminum gear box, 540 RPM
- Two belt transmission w/adjustable tensioner

- Adjustable rear roller and skids
- Rotor with "Y" blades



#### FUNNY TOP

12-30 HP



Cutting Widths  
32" to 62"

Cutting Height  
1" to 4"

Side Shift  
Manual

- Manual side shift 8" left or right of center
- 3PT, CAT I
- Aluminum gear box, 540 RPM
- Two belt transmission w/adjustable tensioner

- Adjustable rear roller and skids
- Rotor with "Y" blades or hammers

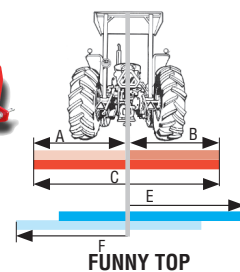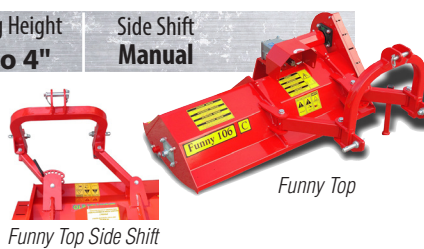

#### FUNNY SUPER


15-35 HP

Cutting Widths  
42" to 52"

Cutting Height  
1" to 4"

Side Shift & Tilt  
Hydraulic

- 3PT, CAT I & II, side shift
- Aluminum gear box, 540 RPM
- Two belt transmission w/adjustable tensioner
- Adjustable rear roller and skids
- Rotor with "Y" blades or hammers
- Universal PTO shaft category 4

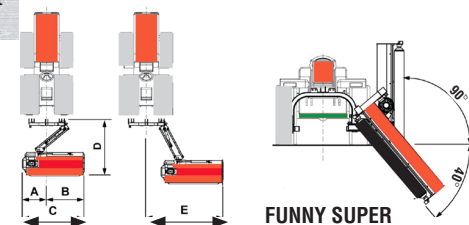

#### MEASUREMENTS *(in inches - approx.)*

- A = Left Measurement From Center
- B = Right Measurement From Center
- C = Working Width
- D = Measurement From Tractor 3PH To Back Of Machine
- E = Maximum Right Side Shift From Center
- F = Maximum Left Side Shift From Center
- G = Weight (lbs.)

	106 FUNNY	132 FUNNY	80 TOP	106 TOP	132 TOP	158 TOP	106 SUPER	132 SUPER
A	21	26	13"	13"	18"	23"	18"	18"
B	21	26	19"	29"	34"	39"	24"	34"
C	42"	52"	32"	42"	52"	62"	42"	52"
D	31"	31"	39"	39"	39"	39"	52"	52"
E	—	—	27"	37"	42"	47"	63"	73"
F	—	—	21"	21"	26"	31"	—	—
G	322	375	286	330	374	418	474	518

Measurements are from center of tractor

## FLIPPER SERIES FLAIL MOWERS

The Flipper flail mower is suitable to every kind of work including turf, forests, orchards & uncultivated land.

### FLIPPER

15-70 HP

Cutting Widths  
52" to 82"


Cutting Height  
1" to 4"

Side Shift  
Fixed Offset

- 8" fixed offset - right
- 3PT, CAT I or II
- Cast iron gear box, 540 RPM
- Three belt transmission w/ adjustable tensioner
- Adjustable rear roller and skids
- Optional side shift offsets up to 14 1/2" to the right from center



Flipper



FLIPPER

### FLIPPER SUPER


50-80 HP

Cutting Widths  
52" to 73"

Cutting Height  
1" to 4"

Side Shift & Tilt  
Hydraulic

- 3PT, CAT I or II with hydraulic side shift
- Cast iron gear box, 540 RPM with free wheel
- Three belt transmission w/adjustable tensioner
- Adjustable rear roller and skids

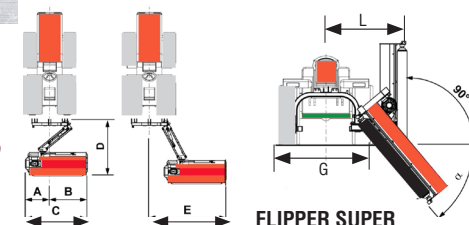

FLIPPER SUPER

### FLIPPER (in inches - approx.)

- A = Left Measurement From Center
- B = Right Measurement From Center
- C = Working Width
- D = Measurement From Tractor 3PH To Back Of Machine
- E = Maximum Right Side Shift From Center
- F = Maximum Left Side Shift From Center
- G = Weight (lbs.)

	132	158	186	214	132 SUPER	158 SUPER	186 SUPER
A	22"	27"	32"	32"	26"	26"	26"
B	30"	35"	40"	50"	32"	42"	53"
C	52"	62"	72"	82"	52"	62"	72"
D	—	—	—	—	59"	59"	59"
*(Optional) E	45"	50"	55"	65"	75"	83"	91"
G	—	—	—	—	47"	51"	55"
L	—	—	—	—	47"	47"	47"
G	540	594	660	826	1080	1157	1208

Measurements are from center of tractor. \*Optional 14 1/2" from center side shift - hydraulic or mechanical

## CENTURION SUPER FLAIL MOWERS

Centurion Super is designed for professional use on medium to large horsepower tractors. Hydraulic offset allows the mower to reach the vegetation under limbs and between trees. The hydraulic tilt makes it possible to clean the inclined edges of ditches or embankments.

### CENTURION SUPER


30-70 HP

Cutting Widths  
42" to 62"


Cutting Height  
1" to 4"

Side Shift & Tilt  
Hydraulic

- 3PT, CAT I or II
- Cast iron gear box, 540 RPM
- 3-belt transmission w/ adjustable tensioner
- Adjustable rear roller and skids

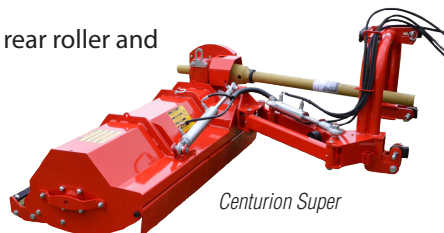

Centurion Super

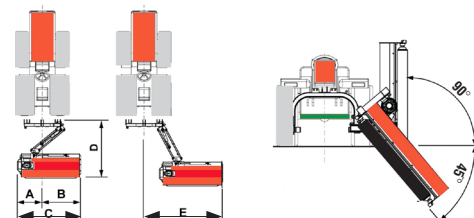

### CENTURION SUPER (in inches - approx.)

- A = Left Measurement From Center
- B = Right Measurement From Center
- C = Working Width
- D = Measurement From Tractor 3PH To Back Of Machine
- E = Maximum Right Side Shift From Center
- F = Maximum Left Side Shift From Center
- G = Weight (lbs.)

	106 SUPER	132 SUPER	158 SUPER
A	18"	18"	18"
B	26"	34"	44"
C	42"	52"	62"
D	58 1/2"	58 1/2"	58 1/2"
E	62"	72"	82"
G	715	815	890

Measurements are from center of tractor

## LEANTE SERIES MOWERS

### LEVANTE Mower

60-120 HP

Cutting Widths  
65" to 98"

Cutting Height  
1" to 5"


Side Shift  
Hydraulic

The Levante Super cuts through tough vegetation and brush up to 2 3/4" in diameter. The Levante Super is well equipped to mow roadside ditches and embankments.

- 16" hydraulic side shift
- 3PT, CAT II or III
- Cast iron gear box, 540 RPM
- 4 belt transmission w/ adjustable tensioner
- Adjustable rear roller and skids



Levante

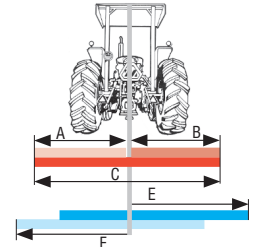

### LEVANTE SUPER

60-120 HP

Cutting Widths  
63" to 86"


Cutting Height  
1" to 5"

Side Shift & Tilt  
Hydraulic

The Levante Super has the same features as the standard Levante with the additional hydraulic side shift and tilt.



Levante Super

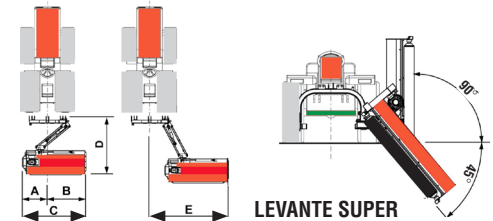

LEVANTE SUPER

### LEVANTE MOWERS (in inches - approx.)

- A = Left Measurement From Center
- B = Right Measurement From Center
- C = Working Width
- D = Measurement From Tractor 3PH To Back Of Machine
- E = Maximum Right Side Shift From Center
- F = Maximum Left Side Shift From Center
- G = Weight (lbs.)

	160	190	220	250	160 SUPER	190 SUPER	220 SUPER
A	36"	37 1/2"	43"	49"	25"	25"	25"
B	29"	37 1/2"	43"	49"	38"	50"	61"
C	65"	75"	86"	98"	63"	75"	86"
D	—	—	—	—	72"	72"	72"
E	44"	52 1/2"	58"	64"	87"	99"	110"
F	20 1/2"	22"	27 1/8"	32"	—	—	—
G	1012	1067	1122	1177	1364	1445	1526

Measurements are from center of tractor

## VICTOR MOWER

### VICTOR FLAIL MOWER

50-120 HP

Cutting Widths  
75" to 106"

Cutting Height  
1" to 5"

Side Shift  
Hydraulic

The Victor is built for rugged terrain, chopping its way through challenging conditions. Can be front or rear mounted.


- 16" hydraulic side shift
- 3PT, CAT II (Reversible)
- Cast iron gear box, 540 RPM
- 4 belt transmission w/adjustable tensioner
- Adjustable rear roller and skids



Victor

### VICTOR FLAIL (in inches - approx.)

- A = Left Measurement From Center
- B = Right Measurement From Center
- C = Working Width
- D = Measurement From Tractor 3PH To Back Of Machine
- E = Maximum Right Side Shift From Center
- G = Weight (lbs.)



	190	210	230	250	270
A	38"	42"	46"	50"	54"
B	38"	42"	46"	50"	54"
C	75"	82"	90"	98"	106"
E	53"	57"	61"	65"	69"
G	1585	1667	1795	1874	1960

Measurements are from center of tractor



# OMEGA FINISHING MOWERS

This gang mower is an excellent choice for athletic fields, parks, large meadows, etc. thanks to its high-quality components.

## OMEGA GANG MOWERS **40-90 HP** Cutting Widths **12' to 19'** Cutting Height **1" to 4"**

- Main frame with 2 pneumatic tires
- Transmission with wide angle PTO shaft
- Mowers raised & lowered hydraulically
- 3 PRM/XRM finishing mowers w/cast iron gearbox 540 RPM & belt drive
- Rear discharge & optional mulching system
- Adjustable height, pivoting wheels
- Category 5, universal slip clutch 1000 mm
- Central lubrication on mowers
- Anti-scalp rollers

*\*Optional Mulching Kit Available*



### OMEGA CONFIGURATION

	CUT WIDTH	MOWER DECKS			
		PRM 120	PRM 150	PRM 180	XRM 235
Omega 12	144"	2	1	-	-
Omega 15	180"	-	2	1	-
Omega 19	222"	-	-	2	1

# PRM FINISHING MOWERS

The PRM rear discharge finishing mower has a high quality cutting system for professional quality and efficient cutting of large areas.

## PRM FINISHING MOWERS **15-70 HP** Cutting Widths **48" to 93"** Cutting Height **1" to 4"**

- 3PT, CAT I
- Hitch flotation front to rear and side to side
- 540 RPM PTO
- 8" Solid tires (4) - 12" on XRM235
- Central lubrication system
- Powder paint
- Shrink wrapped for shipping

*\*Optional anti-scalp roller (standard on PRM 215)*



### PRM FINISHING MOWERS

	CUT WIDTH	CUT HEIGHT	NUMBER OF KNIFES	HP	WEIGHT
PRM 120	48"	1-4"	3	12-70	397 lbs.
PRM 150	60"	1-4"	3	12-70	465 lbs.
PRM 180	72"	1-4"	3	12-70	527 lbs.
PRM 215	85"	1-4"	3	12-70	637 lbs.
XRM 235	93"	1-4"	5	12-70	705 lbs.

## DEL MORINO PRODUCT RANGE



Rotary Tillers



Rotary Harrows



Potato Diggers



Lawnmowers



Brush Mowers

DISTRIBUTED BY



**CUMMINGS & BRICKER, INC.**

Batavia, NY • Carlisle, PA | 1-800-252-1552

[support@cummingsandbricker.com](mailto:support@cummingsandbricker.com)

[www.cummingsandbricker.com](http://www.cummingsandbricker.com)